




Value Line Series

## Value Line Series (VLS) - 85W (24V) Panel

The Value Line Series (VLS) family of solar modules, offered by Ameresco Solar, is a reliable, rugged, and economic panel engineered for off-grid solar applications. The VLS line offers the rugged and reliable construction, materials, and performance.

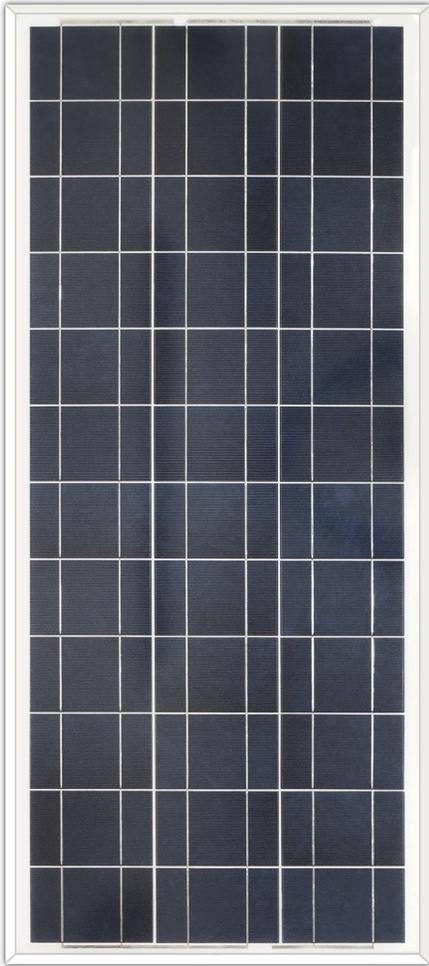

### The VLS-85W (24) Panel features:

Rugged construction, precision engineering and quality components

Tempered glass, EVA lamination and weatherproof backskin that fosters long-life and enhanced cell performance

Manufactured according to International Quality and Environment Management System (ISO9001, ISO14001)

#### ELECTRICAL CHARACTERISTICS

Maximum power ( $P_{max}$ ) <sup>(1)</sup>	85W
Tolerance ( $P_{max}$ )	±5%
Open circuit voltage ( $V_{oc}$ )	44.6V
Maximum power voltage ( $V_{mp}$ )	36.0V
Short circuit current ( $I_{sc}$ )	2.58A
Maximum power current at ( $I_{mp}$ )	2.36A
Maximum system (DC) voltage	80V
Operation temperature range	-40°C - 85°C
NOCT <sup>(2)</sup>	48±3°C
Temperature coefficient of $I_{sc}$	0.084%/°C
Temperature coefficient of $V_{oc}$	-0.390%/°C

#### CERTIFICATIONS




1. Values at Standard Test Conditions (STC): 1000W/m<sup>2</sup> irradiance, AM 1.5 solar spectrum and 25°C module temperature
2. Nominal Operation Cell Temperature: Module operation temperature at 800W/m<sup>2</sup> irradiance, 20°C air temperature, 1m/s wind speed

#### MECHANICAL CHARACTERISTICS


Dimensions	1210 × 536 × 50mm / 47.64 × 21.10 × 1.97 in
Weight	7.3kg / 16.1lbs

#### DIMENSIONS

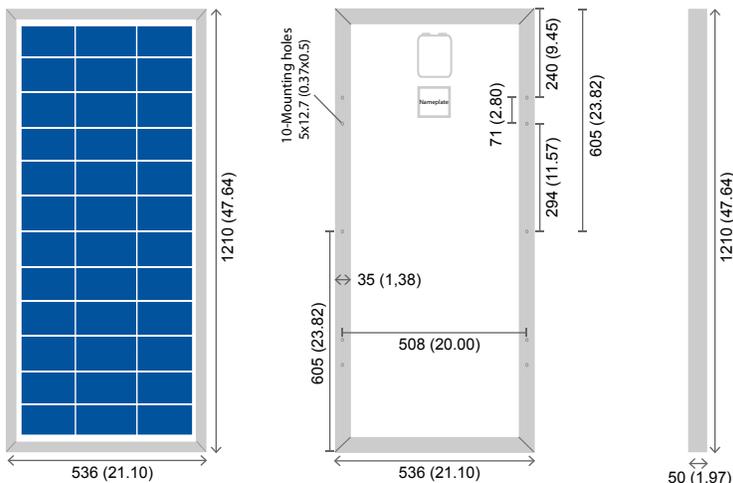


#### IV CURVES

AM1.5, Cell Temp: 25°C

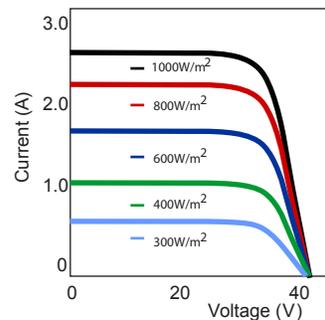

Irradiance: AM1.5, 1KW/m

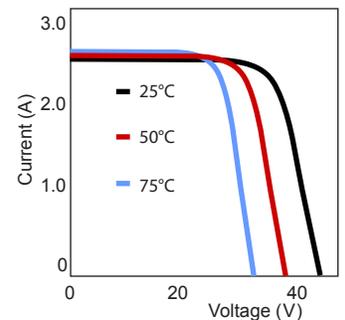

Photographs are intended to portray typical module appearance, actual module appearance may vary. Diagrams may not be proportionate and are intended for illustrative purposes only. 02/02/14