



8A24UT-DEKA


SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	91Ah
Capacity at C/20	79Ah
Weight	53 Lbs. (24kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container / Cover	Polypropylene
Operating Temperature Range	-40°F (-40°C) to 140°F (60°C)

For Charging Parameters please refer to www.mkbattery.com

Click on Technical Data, then on Photovoltaic Charging Parameters in the PV/Solar section

Vent	Self Sealing
Terminal :	G T881)



Rated non-spillable by ICAO, IATA and DOT

Made in U.S.A. by East Penn Manufacturing Co., Inc.


Valve-Regulated, Absorbed Glass Mat Technology



DIMENSIONS

Length (mm)	10.20 (259 mm)
Width (mm)	6.56 (167 mm)
Height (mm)	9.24 (235 mm)

AGM Cycle Life vs Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity

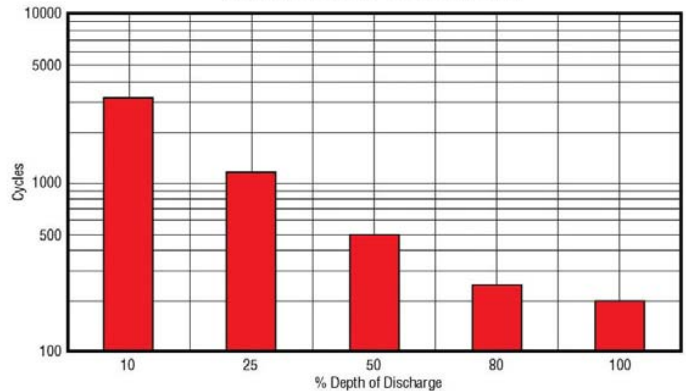

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

For more information on this product and our full-range of solutions, contact Ameresco at **1-855-43-SOLAR**

PS-4742-00-0/11 01.00.0

All data subject to change without notice. No part of this document may be copied or reproduced, electronically or mechanically, without written permission from the company. ©2011 MK Battery Ameresco and the Ameresco logo, the orb symbol and the tagline "Green. Clean. Sustainable." are registered in the U.S. Patent and Trademark Office. All rights reserved.

