


8G34-DEKA

SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	70Ah
Capacity at C/20	60Ah
Weight	42 lbs. (19.1 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)
Charge Voltage @ 68°F (20°C)	
Cycle	2.30 - 2.35VPC
Float	2.25 - 2.30VPC
Vent	Self-sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal	C (Insert w/ 1/4" - 20 round hole)



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Distributed by:


Valve-Regulated, Gelled-Electrolyte Battery



DIMENSIONS

Length (mm)	10.20 (259 mm)
Width (mm)	6.65 (169 mm)
Height (mm)	7.05 (179 mm)

**Gel Cycle Life vs Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity**

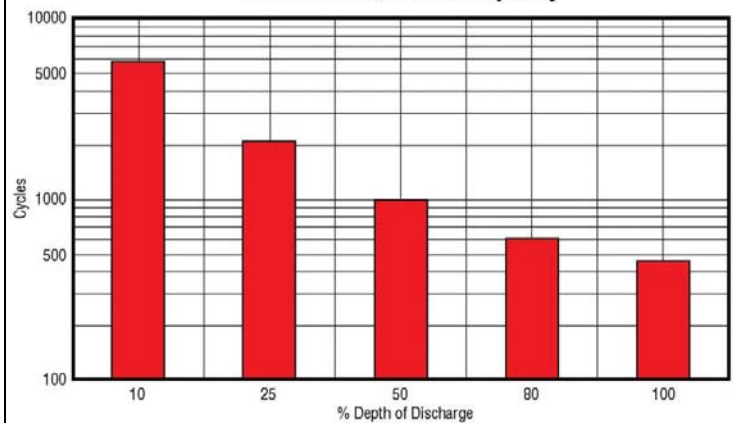

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

