



# 8G4DLTP-DEKA

## SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	210Ah
Capacity at C/20	183Ah
Weight	127 Lbs. (57.6kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container / Cover	Polypropylene
Operating Temperature Range	-76°F ( -60°C ) to 140°F ( 60°C )

For Charging Parameters please refer to [www.mkbattery.com](http://www.mkbattery.com)

Click on Technical Data, then on Photovoltaic Charging Parameters in the PV/Solar section

Vent	Self Sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal :	T (T975)



Rated non-spillable by ICAO, IATA and DOT

Made in U.S.A. by East Penn Manufacturing Co., Inc.


Valve-Regulated, Gelled-Electrolyte Battery



## DIMENSIONS

Length (mm)	20.73 (527 mm)
Width (mm)	8.44 (214 mm)
Height (mm)	10.82 (275 mm)

Gel Cycle Life vs Depth of Discharge at +25°C (77°F)  
Based on BCI 2-hour Capacity

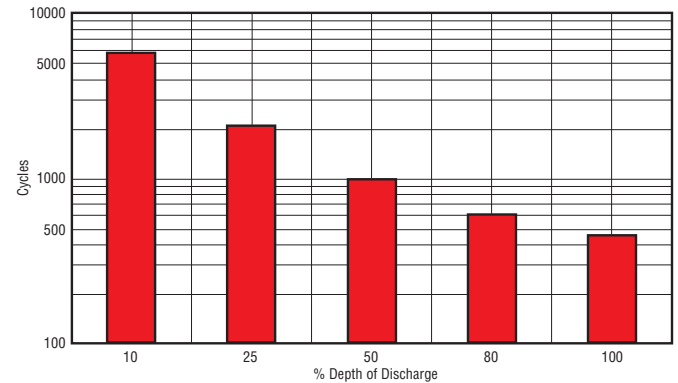

## MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: [sales@mkbattery.com](mailto:sales@mkbattery.com)

For more information on this product and our full-range of solutions, contact Ameresco at **1-855-43-SOLAR**

PS-4060-00-0/11 01.00.0



**AMERESCO**  
Green • Clean • Sustainable