



8G8DLTP-DEKA

SPECIFICATIONS

| | |
|-----------------------------|-----------------------------------|
| Nominal Voltage (V) | 12V |
| Capacity at C/100 | 265Ah |
| Capacity at C/20 | 225Ah |
| Weight | 157 Lbs. (71.2kg) |
| Plate Alloy | Lead Calcium |
| Posts | Forged Terminals & Bushings |
| Container / Cover | Polypropylene |
| Operating Temperature Range | -76°F (-60°C) to 140°F (60°C) |

For Charging Parameters please refer to www.mkbattery.com

Click on Technical Data, then on Photovoltaic Charging Parameters in the PV/Solar section

| | |
|-------------|-------------------------------|
| Vent | Self Sealing |
| Electrolyte | Sulfuric acid thixotropic gel |
| Terminal : | T (T975) |



Rated non-spillable by ICAO, IATA and DOT

Made in U.S.A. by East Penn Manufacturing Co., Inc.


Valve-Regulated, Gelled-Electrolyte Battery



DIMENSIONS

| | |
|-------------|----------------|
| Length (mm) | 21.03 (534 mm) |
| Width (mm) | 11.00 (279 mm) |
| Height (mm) | 10.82 (275 mm) |

Gel Cycle Life vs Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity

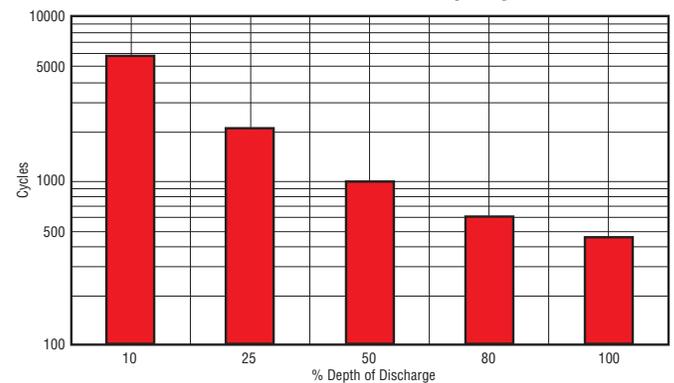

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

For more information on this product and our full-range of solutions, contact Ameresco at **1-855-43-SOLAR**

PS-4061-00-0/11 01.00.0



AMERESCO
Green • Clean • Sustainable