


## 180W (24V) Photovoltaic modules 180J-V

This line of modules is the direct result of over three decades of design, manufacturing and use. Attending to every detail in the design and manufacture of our products, our process controls and testing methods have optimized module life and electrical energy production.

Ameresco Solar's off-grid module line offers the following features and benefits:

### ► Built to last

From mountaintops to off-shore platforms, on weather stations in the bitter cold of Antarctica and on telephone signal repeaters in the hot Australian outback, the technology has been proven in the harshest environments.

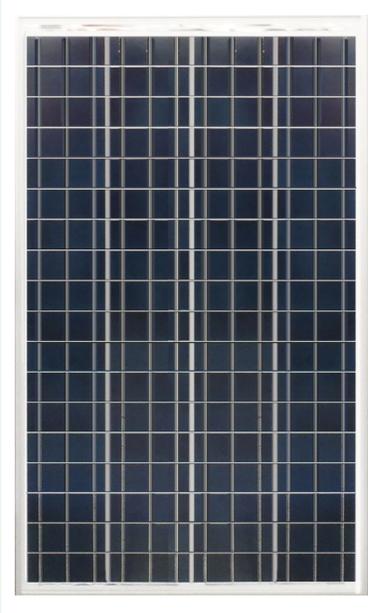

### ► Accessible junction box for off-grid connections

J-type junction box has accessible terminals for easier module interconnections in off-grid applications, and it allows fitting cable glands for various sections.



### ► Thick, durable scratch resistant back sheet

The thick back sheet provides extra insulation and increased resistance to protect your module against rough handling. Made of white polyester, it ensures longer term performance and increased energy production.



### ► High reliability

Cell interconnections and diode placement use well-established industry practice and are field-proven to provide excellent reliability.



### ► Quality and certifications

ISO 9001

ISO 9001 factory certification ensures that our manufacturing facilities use proven manufacturing and quality control processes.



Certified to UL1703 3rd Edition and ULC 1703-01  
Certified for use in Class I, Division 2, Groups ABCD  
Hazardous locations



Certified to IEC 61215 and 61730



Conforms with European Directive 2014/35/EU

# 180W (24V) PHOTOVOLTAIC MODULES - 180J-V

## Electrical characteristics

### 180J-V

(1) STC 1000W/m<sup>2</sup>

(2) NOCT 800W/m<sup>2</sup>

Maximum power (P <sub>max</sub> )	180W	130W
Voltage at P <sub>max</sub> (V <sub>mpp</sub> )	39.75V	35.6V
Current at P <sub>max</sub> (I <sub>mpp</sub> )	4.54A	3.64A
Short circuit current (I <sub>sc</sub> )	4.86A	3.98A
Open circuit voltage (V <sub>oc</sub> )	47.09V	42.6V
Module efficiency	17.5%	
Tolerance (P <sub>max</sub> )	-0 / +3%	
Nominal voltage	24V	
Efficiency reduction at 200W/m <sup>2</sup>	<5% reduction efficiency 16.6%	
Limiting reverse current	4.86A	
Temperature coefficient of I <sub>sc</sub>	0.105%/°C	
Temperature coefficient of V <sub>oc</sub>	-0.360%/°C	
Temperature coefficient of (P <sub>max</sub> )	-0.45%/°C	
(3) NOCT	47±2°C	
Maximum series fuse rating	20A	

Maximum system voltage **600V (U.S. NEC)/1000V (IEC)**

1: Values at Standard Test Conditions (STC): 1000W/m<sup>2</sup> irradiance, AM1.5 solar spectrum and 25°C module temperature

2: Values at 800W/m<sup>2</sup> irradiance, Nominal Operation Cell Temperature (NOCT) and AM1.5 solar spectrum

3: Nominal Operation Cell Temperature: Module operation temperature at 800W/m<sup>2</sup> irradiance, 20°C air temperature, 1m/s wind speed

## Mechanical characteristics

Solar cells	72 crystalline silicon cells in series
Front cover	High transmission 3.2mm (1/8th in) glass
Encapsulant	EVA
Back cover	White polyester
Frame	Silver anodized aluminum
Junction box	IP65 with 4 terminal screw connection block; accepts PG 13.5, M20 13mm (1/2") conduit, or cable fittings accepting 6-12mm diameter cable. Terminals accept 2.5-10mm <sup>2</sup> (8-14 AWG) wire
Dimensions	1504 x 674 x 50mm / 59.2 x 26.5 x 2in
Weight	12kg / 26.5lbs

All dimensional tolerances within ±1% unless otherwise stated.

## Warranty\*

- ▶ Free from defects in materials and workmanship for 2 years
- ▶ 90% min. power output over 12 years
- ▶ Optional 25 years available

\* Refer to warranty document for terms and conditions.

## Certification


Listed to UL1703 3rd Edition & ULC ORD-C1703-01 Standard for Safety by CSA Module Fire Performance Type 4 (for USA) or Class C fire rating (for Canada)

Approved by CSA according to CAN/CSA C22.2 No. 213-17 and UL 12.12.01-Ninth Edition for use in Class I, Division 2, Groups ABCD Hazardous (Classified) Locations

Approved by Intertek to IEC 61730 and IEC 61215


AMERESCO SOLAR

Green • Clean • Sustainable

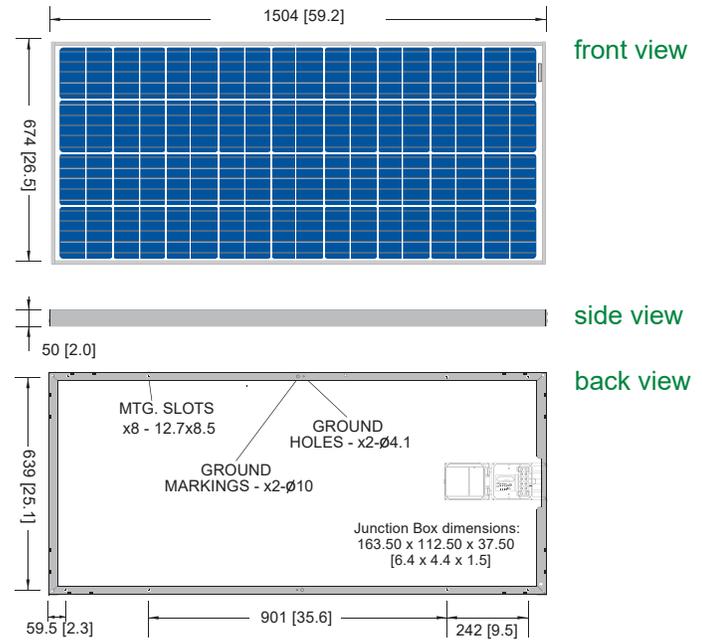


Dimensions in mm [in].

## Temperature - dependence of performance (180 module)

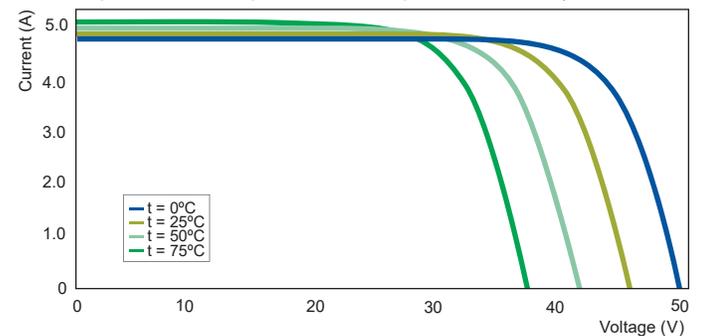

## Irradiance - dependence of performance (180 module)

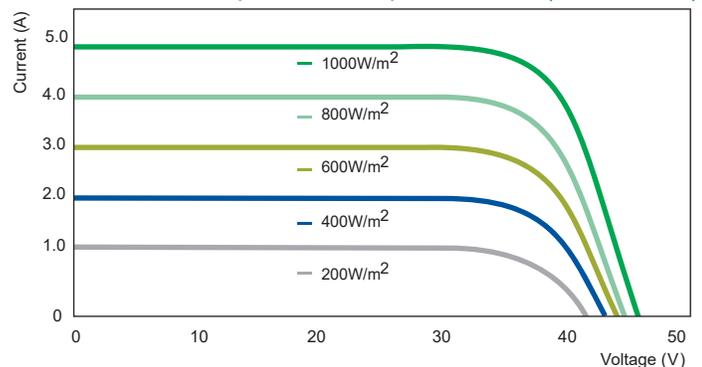

For more information, call 855-43-SOLAR or visit [www.amerescosolar.com](http://www.amerescosolar.com).