

GC15DT-DEKA


SPECIFICATIONS

Nominal Voltage (V)	6V
Capacity at C/100	280 Ah
Capacity at C/20	230 Ah
Weight	63 lbs. (28.6 kg)
Container/Cover	Polypropylene
Operating Temperature Range	-22°F (-30°C) - 122°F (50°C)

For Charging Parameters please refer to www.mkbattery.com

Click on Technical Data, then on Photovoltaic Charging Parameters in the PV/Solar section

Vent	Individual quarter—turn bayonet vent cap
Self Discharge	1% per week
Terminal	U (SAE/STUD)



Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:

Flooded Battery, Wet type




DIMENSIONS

Inches (mm)

Length	10.25 (260 mm)
Width	7.13 (181 mm)
Height	10.88 (276 mm)

Depth of Discharge vs. Cycles

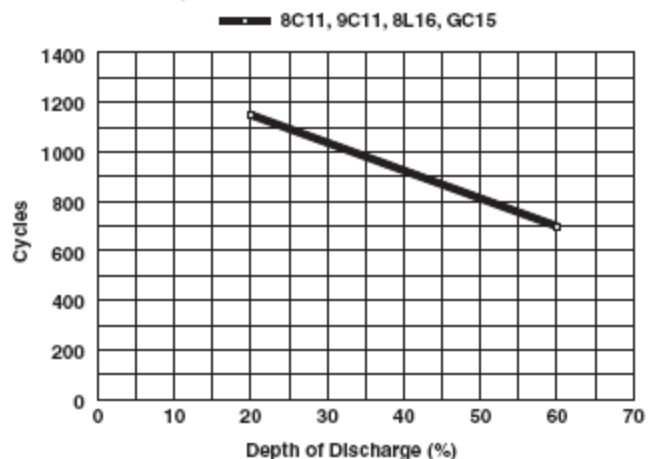

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

