



“ENERGY INSPIRED BY NATURE”

SS 100W Series



**Quality Product**

All Manufactured Modules are tested 100% by EL (Electroluminescence) during the Production Process and Free from Micro Cracks.

Our high-performance modules are highly efficient, reliable, and provide optimal output. The company manufactures solar modules in compliance with global standard including MNRE, IEC 61215, 61730-1, 61730-2, 61701, UL 1703 ISO 9001:2008 and ISO 14001:2008 and 18001:2007.

**High Efficiency**

High Module efficiency is obtaining top performance even in diffused light conditions. We are leaders in providing our customers with maximum sunlight conversion.

**Application Possibilities**

Residential and Commercial Rooftops, Car Ports, Solar Farming, Balconies, Awnings, Street Lights Fences, Canopies, etc.

**Our Team**

We have a team of qualified experts and engineers making sure that modules produce maximum power. We pride ourselves in caring for each individual customer needs with detailed attentions. Our end goal is to give a highly efficient product with exceptional customer service.

**Guarantee**

Our product is durable and has a 25 year performance warranty. Integrated manufacturing of cells and modules in one production line guarantees optimum performance.

**RFID**

RFID is an Radio Frequency Identification Technology - enables every individual modules to be uniquely identified. We can provide RFID tag as per customer's request.

**US Office:**

Sonali Energies USA LLC.,  
409 Grand Avenue, Suite 3,  
Englewood, NJ 07631  
Tel: 201-568-1424  
Toll Free: 1.888.58.SOLAR  
salesusa@sonalisolar.com

**Manufacturing Facility:**

Plot No. 180-199  
Surat Special Economic Zone  
Sachin-Dist. Surat 394230  
Gujarat, India  
Tel: + 91 0261 2399910/2398007  
sales@sonalisolar.com  
marketing@sonalisolar.com



## Electrical Specifications

Nominal Maximum Power (Pmax)	100 W
Optimum Operating Voltage (Vmp)	18.64 V
Optimum Operating Current (Imp)	5.36 A
Open Circuit Voltage (Voc)	22.23 V
Short Circuit Current (Isc)	5.79 A

\* Measurement Power Tolerance on Power 0 / +%

\* Under Standard Test Conditions (STC) of irradiance of 1000W/m<sup>2</sup>, spectrum AM 1.5 and cell temperature of 25°C

\* Normal Operating cell temperature (NOCT) of irradiance of 800W/m<sup>2</sup>, spectrum AM 1.5 and ambient temperature of 20°C, ± 2°C

## Mechanical Specification

Module Specifications	(1074 X 495 X 35 mm) / (42.28 X 19.45 X 1.38 inch)
Weight	15 kgs / 33.1 lbs
Junction	PV-LH0801
Cable & Connectors	Solar Cable 900mm length with 4.0mm <sup>2</sup> double insulated cable, multi contact connector
Cell Arrangement	36 (2 x 18)
Front Cover	3.2 mm Tempered Glass (ARC)
Encapsulate	EVA
Back Cover	Composite Sheet
Frame	Anodized aluminum alloy

### Temperature coefficient


Coefficient of Current	(+0.035 %/K)	Product Warranty	12 Years
Coefficient of Voltage	(-0.351 %/K)	Performance Warranty	First 10 Years up to 90%, next 15 years up to 80%
Coefficient of Power	(-0.47 %/ K)	Approvals & Certificates	IEC 61215, 61730-1, 61730-2 & 61701 UL 1703 MCS, MNRE

### Product Guarantees

### Tested Operating Conditions

Temperature Cycling Range	(-40 C ~+85 C)
Humidity Freeze, Damp Heat	85% RH

### Dimensions

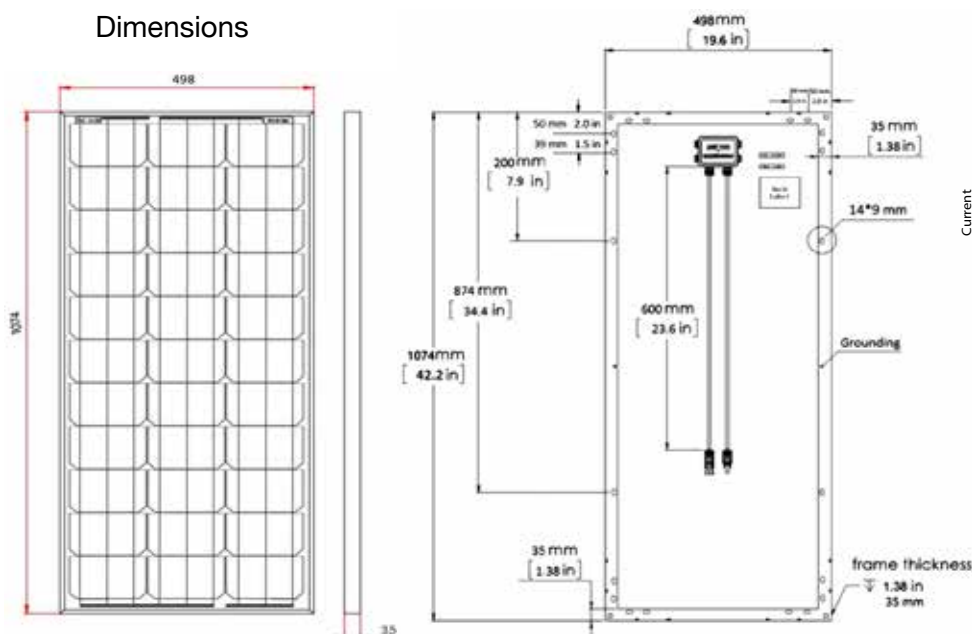

### IV Curve

#### Measurement Performance

